



DUMP TRAILER


# PRONAR T701HP



PRONAR T701HP

TECHNICAL DATA FOR STANDARD MODEL	T701HP
Permitted total weight [kg   lbs]	21000*   46297*
Empty weight [kg   lbs]	5900   13007
Loading volume [m <sup>3</sup>   ft <sup>3</sup> ]	12,5   441
Total length/total width/total height [mm   ft]	7570/2550/2840   24'10"/7'4.6"/9'3.8"
Internal length of the loading space [mm   ft] / Internal width of the platform top/bottom [mm   ft]	5300/2250/2300   17'4.7"/8'4.4"/7'6.5"
Loading height [mm   ft]	2480   8'1.6"
Track gauge [mm   ft]	1960   6'5"
Suspension	Bogie
Hitch-ring load [kg   lbs]	3000*   6614*
Tyres	550/60-22,5
Perm. speed [km/h   mph]	40   24'85"
Tipping system / tipping angle (to the rear) [°]	One-sided / 55
Sheet thickness (floor/side walls) [mm   in]	6/6   0.23" / 0.23"
Required tractor power [KW/ HP]	125/92

\* permissible total weight 48502lb with K80=8818lb | 22000kg with K80=4000kg (consultation required)

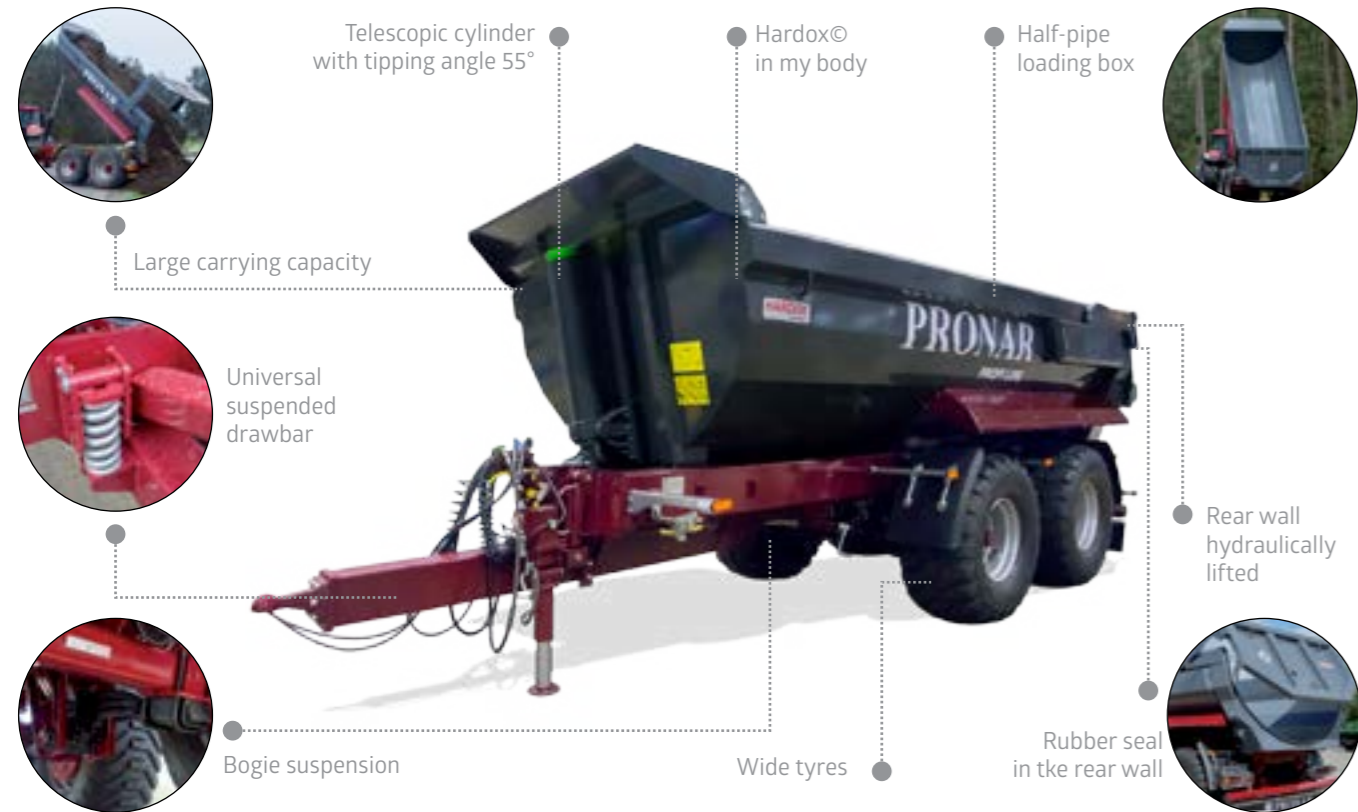

## PRONAR PROFI LINE Trailers - ready for hard work

T701	T701HP	T679/2	T679/3	T679/4M
46297 lbs	46297 lbs	36045 lbs	29100 lbs	23810 lbs

**HARDOX**  
IN MY BODY

- Solid, monocoque loading box made from Hardox steel (optionally)
- Wide range of additional equipment
- Vast majority of components made by Pronar
- Reliability tested in own certified R&D Centre



PRONAR Sp. z o.o. | Mickiewicza 101 A | 17-210 Narew | Poland  
 northamerica@pronar-agro.com | pronar-agro.com  
 +48 507 101 663 | +48 85 68 54 541 | +48 515 068 475



# DUMP TRAILERS





DUMP TRAILER

# PRONAR T679/4M | T679/3

## PRONAR T679/4M



## PRONAR T679/3



TECHNICAL DATA FOR STANDARD MODEL	T679/4M	T679/3
Permitted total weight [kg   lbs]	10850   23 920	13200   29 100
Empty weight [kg   lbs]	2020   4 453	2840   6 261
Loading volume [m³   ft³]	4,5   159	6,4   226
Total length/total width/total height [mm   ft]	5380/2400/1560   17.7.8"/7.7.10.5"/5.1.4"	5674/2550/1775   18.7.4"/8.4.4"/5.9.9"
Internal length (at the floor/on top)   width of the loading space [mm   ft]	3540/3700   11.7.4"/12.1.7"	4000   13.1.5"
Loading width [mm   ft]	2210   7.3"	2416   7.11"
Side wall height [mm   in]	550 (+800 optional)   21.65"+31.5" (Option)	648 (+800 optional)   25.5"+31.5" (Option)
Platform height [mm   in]	1010   39.8"	1085   42.7"
Side wall height [mm   in]	1640   64.57"	1990   78.3"
Suspension	Tandem	Tandem
Towing eye [mm   in]	Ø40   Ø1.58"	Ø40   Ø1.58"
Perm. speed [km/h   mph]	25/40"   15.5"/24.85"	25   15.5"
Tipping system/tipping angle [°]	One-sided/50	One-sided/50
Sheet thickness (floor/side walls) [mm   in]	4/4   0.15"/0.15"	6/6/4   0.24"/0.24"/0.15"
Required tractor power [KW/ HP]	62,6/46'	69,4/51'
Hardox trough	as Option	as Option



Tandem - chassis with drum brakes 11.8"x3.5" | 300x90mm



Special design: various RAL paints available as option; extensions 31.5" | 800 mm to increase loading volume



High tipping angle enables fast unloading



Swing tailgate for easier unloading



Rounded front wall of the body (adapted for the use of the ditching bucket)



Swinging wing tailgate



DUMP TRAILER

# PRONAR T679/2

## PRONAR T679/2



TECHNICAL DATA FOR STANDARD MODEL	T679/2
Permitted total weight [kg   lbs]	16350   36045
Empty weight [kg   lbs]	4350   9590
Loading volume [m³   ft³]	7,7   272
Total length/total width/total height [mm   ft]	6230/2546/2080   20.5.2"/8.4.2"/6.9.9"
Internal length (at the floor/on top)   width of the loading space [mm   ft]	4625/4500   15.2.1"/14.9.2"
Loading width [mm   ft]	2410   7.10.9"
Side wall height [mm   in]	700 (+800mm optional)   27.6"
Platform height [mm   in]	1240   48.8"
Side wall height [mm   in]	1860   73.2"
Suspension	Parabolic suspension
Towing eye [mm   in]	Ø40   Ø1.58"
Perm. speed [km/h   mph]	40   24.85"
Tipping system/tipping angle [°]	One-sided/55
Sheet thickness (floor/side walls) [mm   in]	10/8   0.40"/0.31"
Required tractor power [KW/ HP]	83,2/61'
Hardox trough	as Option



If required, additional rear pendulum flap available



Construction trailer can be used for transporting agricultural products with optional 2'7.5" | 800 mm high attachments



Tandem suspension with trailing arms; equipped with half axles with drum brakes



Wide range of optional equipment



Rear lighting fitted with protective grids, for special working conditions



DUMP TRAILER

# PRONAR T701

## PRONAR T701



TECHNICAL DATA FOR STANDARD MODEL	T701
Permitted total weight [kg   lbs]	21000   46297
Empty weight [kg   lbs]	6160   13580
Loading volume [m³   ft³]	10,6   374
Total length/total width/total height [mm   ft]	7360/2550/2470   24.1.7"/8.4.4"/8.1.2"
Internal length (at the floor/on top)   width of the loading space [mm   ft]	5600   18.4.5"
Loading width [mm   ft]	2410   7.10.9"
Side wall height [mm   in]	800   31.5"
Platform height [mm   in]	1475   58.1"
Side wall height [mm   in]	2060   81.1"
Suspension	Parabolic suspension/bogie (as option)
Towing eye [mm   in]	Ø40   Ø1.58"
Perm. speed [km/h   mph]	40   24.85"
Tipping system/tipping angle [°]	one-sided/55 (2 tilt cylinders)
Sheet thickness (floor/side walls) [mm   in]	10/8   0.40"/0.31"
Required tractor power [KW/ HP]	124,8/917"
Hardox trough	as Option



Sturdy construction for any application




Thanks to the increased sheet metal thickness of the floor and drop sides, long-term use of the trailer is guaranteed



Hydraulic tailgate 14.6" | 370 mm high



Two telescopic cylinders for reliable unloading

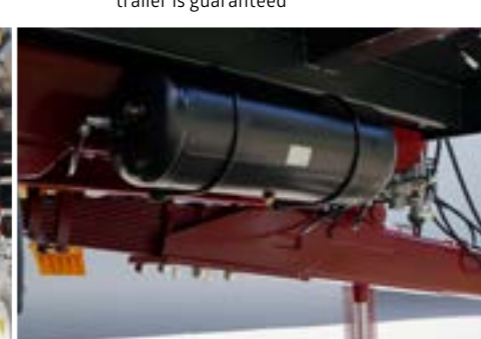

Sprung drawbar increases driving comfort



Reliable support leg thanks to hydraulic system